


HG235A/B FOOTBALL GAME

INSTALL MANUAL



**CAUTIONS!**

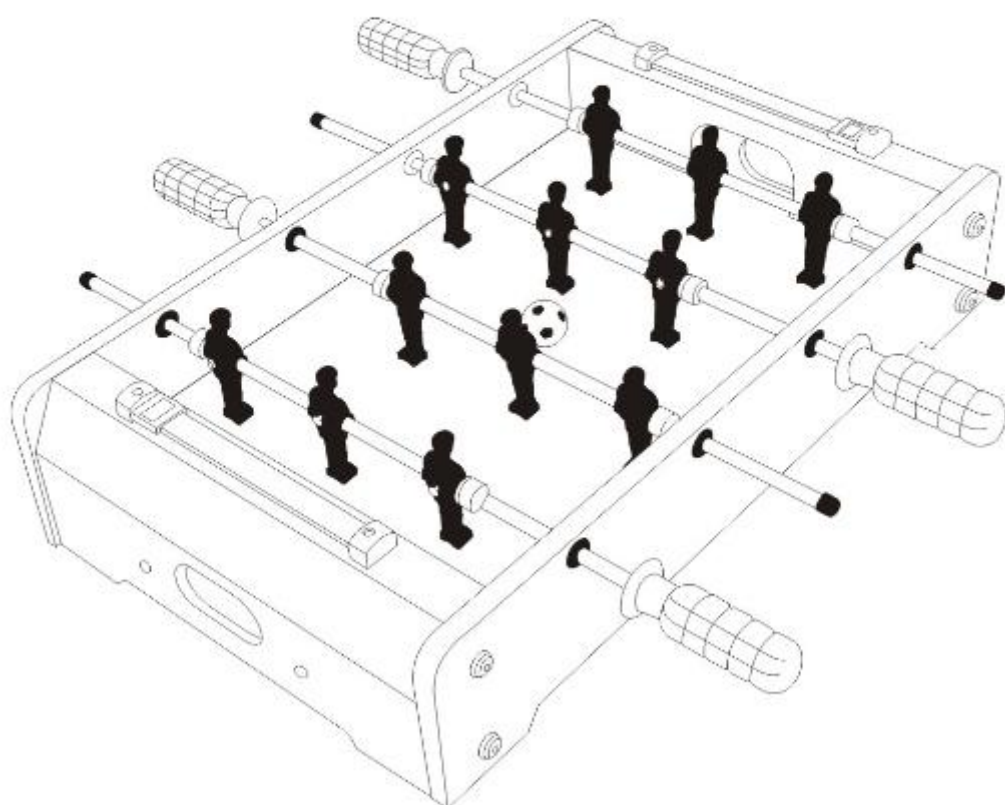




Must assure the product is completely correctly assembled according to the instruction before using.








Assembly tools included in box

The process of assembly must be done by adult or under direction by adult.

REMOVE THE PROTECTION FILM OF THE PRODUCT PARTS BEFORE INSTALL.

PARTS:

Number		Qty
A1		x 2
A2		x 4
B1		x 8
B3		x 4
C1		x 1

Number		Qty
E1		x 2
E2		x 2
E3		x 1
E4		x 2
E5		x 8
E7		x 2
E8		x 4


Home Team

T1		x 1
T2		x 1


Away Team

T3		x 1
T4		x 1


FIT PROCESS:

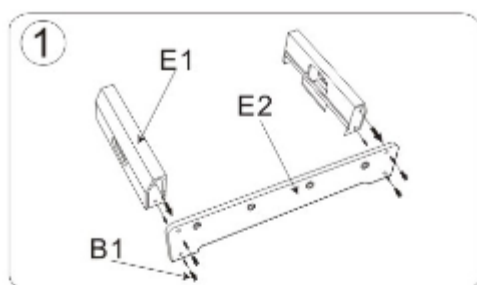


Assemble two short boards and one long board, then connected by screws.

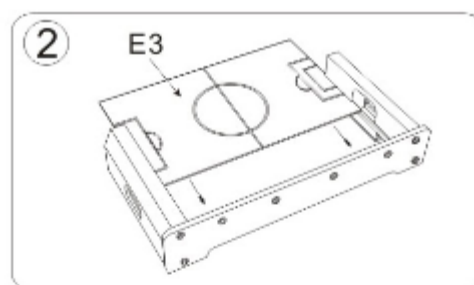


Insert the bottom board into the assembled boards of 1step.

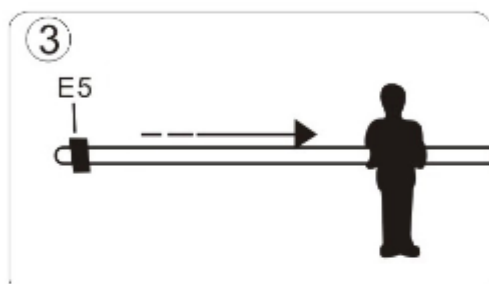


Slide one E5 washer with the flat side toward the athlete onto each end of T1, T2 athlete bars. Push the rubber bumper and washer snug against each outside athlete.

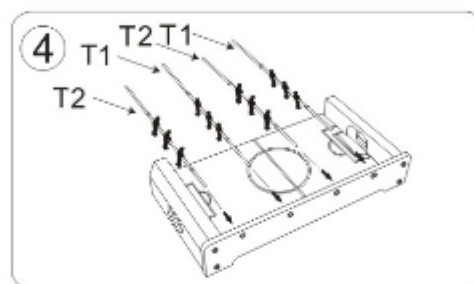


Install the bars with athletes into the wholes of the long board.

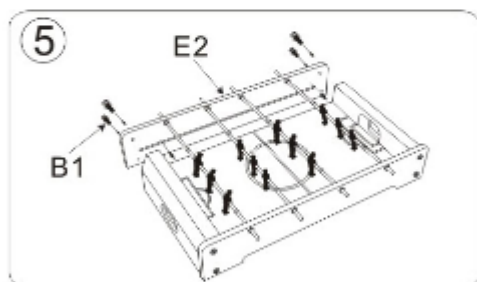


Insert the last long board right to the position of the bars, then screw it.

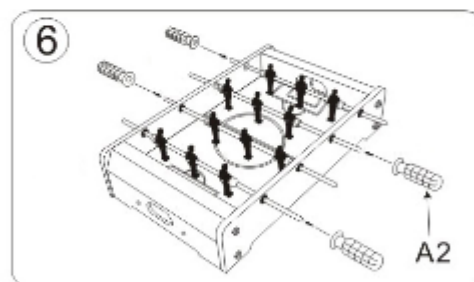

Insert six handles and six cover into the bars, make sure that all the handles are tightened.

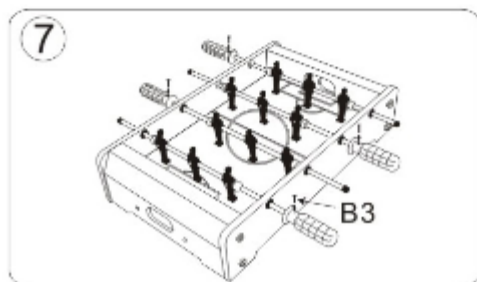


Insert six filature into handles and screw it.

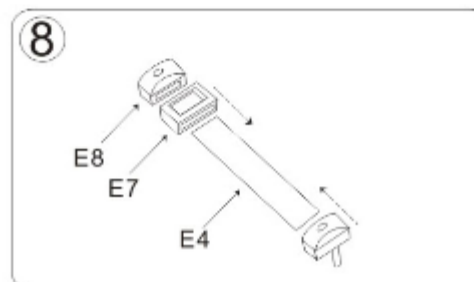


Fix the parts of spring timer

FIT PROCESS:

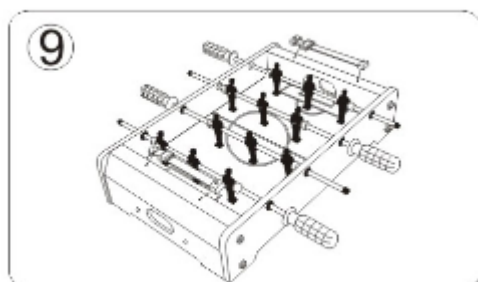

Install two markers into each end side.

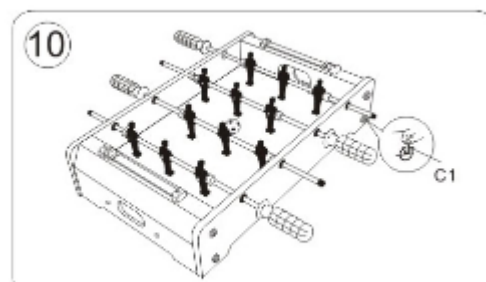

make sure the table is balanceable and use tool screw all nuts.