

# Bestway.

[www.bestway-global.com](http://www.bestway-global.com)  
[www.bestway-service.com](http://www.bestway-service.com)






# WARNING / ATENÇÃO / ADVERTENCIA / ACHTUNG / VAROITUS WAARSCHUWING / AVVERTENZA / ATTENTION / ΠΡΟΕΙΔΟΠΟΙΗΣΗ ΒΗΜΑΝΗΕ / OSTRZEŻENIE / FIGYELMEZTETÉS / VARNING

smooth out the bottom  
suavizar o fundo  
suavizar la parte inferior  
glätten den Boden  
tasoiittaa pohjaan

glad uit de bodem  
appianare il fondo  
lisser le fond  
ΕΞΟΜΑΛΥΝΕΙ ΤΟ ΠΥΘΜΕΝΑ  
сгладить нижней

wygładzić dna  
elsimítására az alsó  
jämna ut botten

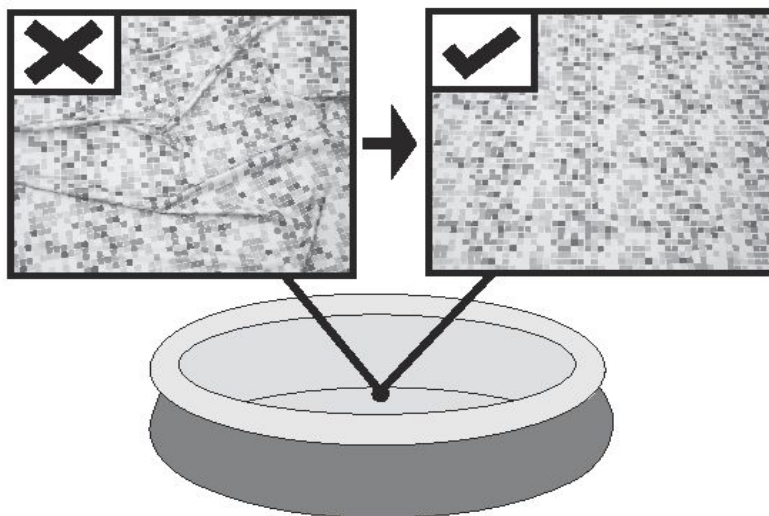

Put 1" to 2" water in the pool to cover the floor. Once pool floor is slightly covered, gently smooth out all wrinkles. Start in the center of the pool and work your way clockwise to the outside.

Encher a piscina com uma quantidade de água suficiente para cobrir a superfície (de 2 a 5 cm). Uma vez que a superfície estiver levemente coberta, eliminar todas as dobras presentes, começando pelo centro da piscina e continuando, no sentido horário, em direcção à parte externa.

Ponga de 1" a 2" de agua en la piscina para cubrir el suelo. Cuando la piscina esté un poco cubierta, alise suavemente las arrugas. Comience desde el centro de la piscina y trabaje en sentido horario hacia el exterior.

Füllen Sie 1" bis 2" Wasser in den Pool, so dass der Boden bedeckt ist. Glätten Sie vorsichtig alle Falten sobald der Poolboden leicht bedeckt ist. Beginnen Sie in der Mitte des Pools und arbeiten Sie im Uhrzeigersinn zur Außenseite.

Laita altaaseen 2,5 - 5cm:n kerros vettä pohjan peittämiseksi. Kun altaan pohja on peittynyt, silitä varovasti kaikki rypyt. Aloita keskeltä ja etene myötäpäivään laidalle.

Doe 1" tot 2" water in het zwembad, net voldoende om de bodem onder water te zetten. Wanneer dit gebeurd is worden alle rimpels voorzichtig gladgestreken. Begin in het midden van het zwembad en ga zo rechtson naar de rand toe.

Riempire la piscina con una quantità d'acqua sufficiente a coprire la superficie (da 2,5 a 5cm) Una volta piscina verso l'esterno muovendosi in senso orario. eseguita questa operazione, eliminare tutte le pieghe presenti sulla superficie partendo dal centro della.

Mettre quelques centimètres d'eau dans la piscine pour couvrir le sol. Une fois que le sol de la piscine est légèrement recouvert, lissez tous les plis. Commencez par le centre de la piscine et continuez dans le sens des aiguilles d'une montre vers l'extérieur.

ΒΑΛΤΕ 1" ΕΩΣ 2" ΝΕΡΟ ΣΤΗΝ ΠΙΣΙΝΑ ΓΙΑ ΝΑ ΚΑΛΥΨΕΤΕ ΤΟ ΠΑΤΩΜΑ. ΜΟΛΙΣ ΚΑΛΥΨΘΕΙ ΕΛΑΦΡΑ ΤΟ ΠΑΤΩΜΑ ΤΗΣ ΠΙΣΙΝΑΣ, Ο ΕΓΚΑΤΑΣΤΑΤΗΣ ΠΡΕΠΕΙ ΝΑ ΙΣΙΩΣΕΙ ΟΛΕΣ ΤΙΣ ΠΤΥΧΕΣ. ΞΕΚΙΝΗΣΤΕ ΑΠΟ ΤΟ ΚΕΝΤΡΟ ΤΗΣ ΠΙΣΙΝΑΣ ΚΑΙ ΣΥΝΕΧΙΣΤΕ ΔΕΞΙΟΣΤΡΟΦΑ ΠΡΟΣ ΤΑ ΕΞΩ.

Налейте немного воды в бассейн так, чтобы она покрывала дно на 3-5 сантиметров. Когда вода налита, аккуратно расправьте складки дна. Начинайте с центра бассейна и двигайтесь к краям по часовой стрелке.

Puść wodę do basenu o głębokości 1" - 2", aby jej warstwa zakryła dno basenu. Jeśli dno basenu jest już trochę zakryte wodą, delikatnie wygładź wszystkie jego fałdy. Zaczynj od środka basenu i idąc w kierunku zgodnym z ruchem wskazówek zegara, podążaj do brzegu basenu.

A medencébe engedjen 1" - 2" mélységű vizet, hogy az a medence fenekét befedje. Ha a medence alján egy kis mennyiségű víz található, a gyűrődéseket finoman egyenesítse ki. A medence közepétől kezdje és az óramutató járásával megegyezően haladjon a medence széle felé.

Häll 1" till 2" vatten i poolen för att täcka golvet. Då poolgolvet är något täckt, ska du släta ut alla veck. Börja i mitten av poolen och arbeta dig medsols utåt.

# FAST SET™ POOLS OWNER'S MANUAL



## Product Description

Item No.	Dimension	Kit Type	Accessories
#57265	2.44m x 66cm (8' x 26")	Aboveground swimming pool kit	/
#57267	2.44m x 66cm (8' x 26")	Aboveground swimming pool kit	☑ Filtration System
#57268	2.44m x 66cm (8' x 26")	Aboveground swimming pool kit	☑ Filtration System
#57271	2.74m x 76cm (9' x 30")	Aboveground swimming pool kit	/
#57272	2.74m x 76cm (9' x 30")	Aboveground swimming pool kit	☑ Filtration System
#57266	3.05m x 76cm (10' x 30")	Aboveground swimming pool kit	/
#57269	3.05m x 76cm (10' x 30")	Aboveground swimming pool kit	☑ Filtration System
#57270	3.05m x 76cm (10' x 30")	Aboveground swimming pool kit	☑ Filtration System
#57273	3.66m x 76cm (12' x 30")	Aboveground swimming pool kit	/
#57274	3.66m x 76cm (12' x 30")	Aboveground swimming pool kit	☑ Filtration System
#57275	3.66m x 76cm (12' x 30")	Aboveground swimming pool kit	☑ Filtration System
#57319	3.66m x 84cm (12' x 33")	Aboveground swimming pool kit	/
#57321	3.66m x 84cm (12' x 33")	Aboveground swimming pool kit	☑ Filtration System
#57323	3.66m x 84cm (12' x 33")	Aboveground swimming pool kit	☑ Filtration System
#57309	3.66m x 91cm (12' x 36")	Aboveground swimming pool kit	/
#57278	3.66m x 91cm (12' x 36")	Aboveground swimming pool kit	☑ Filtration System
#57263	3.66m x 91cm (12' x 36")	Aboveground swimming pool kit	☑ Filtration System
#57277	3.66m x 91cm (12' x 36")	Aboveground swimming pool kit	☑ Filtration System ☑ Ladder
#57313	4.57m x 84cm (15' x 33")	Aboveground swimming pool kit	☑ Filtration System
#57315	4.57m x 84cm (15' x 33")	Aboveground swimming pool kit	☑ Filtration System ☑ Ladder ☑ Pool Cover ☑ Ground Cloth
#57316	4.57m x 84cm (15' x 33")	Aboveground swimming pool kit	☑ Filtration System ☑ Ladder ☑ Pool Cover ☑ Ground Cloth
#57310	4.57m x 91cm (15' x 36")	Aboveground swimming pool kit	/
#57282	4.57m x 91cm (15' x 36")	Aboveground swimming pool kit	☑ Filtration System ☑ Ladder
#57293	4.57m x 91cm (15' x 36")	Aboveground swimming pool kit	☑ Filtration System
#57121	4.57m x 91cm (15' x 36")	Aboveground swimming pool kit	☑ Filtration System
#57280	4.57m x 91cm (15' x 36")	Aboveground swimming pool kit	☑ Filtration System ☑ Ladder ☑ Pool Cover ☑ Ground Cloth
#57281	4.57m x 91cm (15' x 36")	Aboveground swimming pool kit	☑ Filtration System ☑ Ladder ☑ Pool Cover ☑ Ground Cloth
#57311	4.57m x 1.07m (15' x 42")	Aboveground swimming pool kit	/
#57294	4.57m x 1.07m (15' x 42")	Aboveground swimming pool kit	☑ Filtration System ☑ Ladder ☑ Pool Cover ☑ Ground Cloth
#57289	4.57m x 1.22m (15' x 48")	Aboveground swimming pool kit	☑ Filtration System ☑ Ladder ☑ Pool Cover ☑ Ground Cloth
#57291	5.49m x 1.22m (18' x 48")	Aboveground swimming pool kit	☑ Filtration System ☑ Ladder ☑ Pool Cover ☑ Ground Cloth

Installation usually takes approximately 10 minutes with 2-3 people excluding earthworks and filling.

## WARNING

Carefully read, understand, and follow all information in this user manual before installing and using the swimming pool. These warnings, instructions, and safety guidelines address some common risks of water recreation, but they cannot cover all risks and dangers in all cases. Always use caution, common sense, and good judgment when enjoying any water activity. Retain this information for future use.

### Non Swimmers safety

- Continuous, active, and vigilant supervision of weak swimmers and non-swimmers by a competent adult is required at all times (remembering that children under five are at the highest risk of drowning).
- Designate a competent adult to supervise the pool each time it is being used.
- Weak swimmers or non-swimmers should wear personal protection equipment when using the pool.
- When the pool is not in use, or unsupervised, remove all toys from the swimming pool and its surrounding to avoid attracting children to the pool.

### Safety devices

- In order to prevent children from drowning, it is recommended to secure the access to the pool with a protection device. In order to prevent children climbing from the inlet and outlet valve, it is recommended to install a barrier (and secure all doors and windows, where applicable) to prevent unauthorized access to the swimming pool.
- Barriers, pool covers, pool alarms, or similar safety devices are helpful aids, but they are not substitutes for continuous and competent adult supervision.

### Safety equipment

- It is recommended to keep rescue equipment (e.g. a ring buoy) by the pool.
- Keep a working phone and a list of emergency phone numbers near the pool.

### Safe use of the pool

- Encourage all users especially children to learn how to swim.
- Learn Basic Life Support (Cardiopulmonary Resuscitation - CPR) and refresh this knowledge regularly. This can make a life-saving difference in the event of an emergency.
- Instruct all pool users, including children, what to do in case of an emergency.
- Never dive into any shallow body of water. This can lead to serious injury or death.
- Do not use the swimming pool when using alcohol or medication that may impair your ability to safely use the pool.
- When pool covers are used, remove them completely from the water surface before entering the pool.
- Protect pool occupants from water related illnesses by keeping the pool water treated and practicing good hygiene. Consult the water treatment guidelines in the user's manual.
- Store chemicals (e.g. water treatment, cleaning or disinfection products) out of the reach of children.
- Use the signage as outlined below. Signage is to be displayed in a prominent position within 2m of the pool.







Keep children under supervision in the aquatic environment. No diving.

- Removable ladders shall be placed on a horizontal surface.
- Irrespective of materials used for swimming pool construction, accessible surfaces have to be checked regularly to avoid injuries.
- Regularly monitor bolts and screws. Remove splinters or any sharp edges to avoid injuries.
- **ATTENTION:** Do not leave the drained pool outside. The empty pool is liable to become deformed and/or displaced due to wind.
- If you have a filter pump, refer to the pump's manual for instructions.
- **WARNING!** The pump cannot be used while people are inside the pool.
- If you have a ladder, refer to the ladder's manual for instructions.
- **WARNING!** The use of a swimming pool implies compliance with the safety instructions described in the operating and maintenance guide. In order to prevent drowning or other serious injuries, pay particular attention to the possibility of unexpected access to the swimming pool by children under 5 years by securing the access to it, and, during the bathing period, keep them under constant adult supervision.





Please read carefully and keep for future reference

Below parts are for all sizes of pool

#01	#02	#03	#04
 X1	 X2	 X1	 X1
Liner	Heavy-duty repair patch	Hose Adaptor	Drain Valve Cap
Please refer to below table	#F1B4.17	#F4D019B-03A (blue) #F4H019B-03A (grey) #F4A019B-03A (white)	#P6D1158 (blue) #P6H1158 (grey) #P6A1158 (white)

Not for 5.49m x 1.22m  
(18' x 48") sized of pool

Below parts for 5.49m x 1.22m (18' x 48") only

#05	#06	#07	#08
 X2	 X2	 X1	 X1
Stopper	Control Valve	Pool outlet Strainer	Pool inlet Strainer
#F4D018B-02 (blue) #F4H018B-02 (grey) #F4A018B-02 (white)	#P6D510	#P61323	#P61317

NO.	Name	QTY	Part NO.	Remark
01	Liner	1	57291ASS16	#57291 5.49m x 1.22m (18'x48")
			57289ASS16	#57289 4.57m x 1.22m (15'x48")
			57294ASS16	#57294 4.57m x 1.07m (15'x42")
			57294ASS16	#57311 4.57m x 1.07m (15'x42")
			57282ASS16	#57281 4.57m x 91cm (15'x36")
			57282ASS16	#57280 4.57m x 91cm (15'x36")
			57282ASS16	#57121 4.57m x 91cm (15'x36")
			57282ASS16	#57293 4.57m x 91cm (15'x36")
			57282ASS16	#57282 4.57m x 91cm (15'x36")
			57282ASS16	#57310 4.57m x 91cm (15'x36")
			57313ASS16	#57318 4.57m x 84cm (15'x33")
			57313ASS16	#57316 4.57m x 84cm (15'x33")
			57313ASS16	#57315 4.57m x 84cm (15'x33")
			57313ASS16	#57313 4.57m x 84cm (15'x33")
			57277ASS16	#57277 3.66m x 91cm (12'x36")
			57277ASS16	#57263 3.66m x 91cm (12'x36")
			57277ASS16	#57278 3.66m x 91cm (12'x36")
			57277ASS16	#57309 3.66m x 91cm (12'x36")
			57319ASS16	#57323 3.96m x 84cm (13'x33")
			57319ASS16	#57321 3.96m x 84cm (13'x33")
			57319ASS16	#57319 3.96m x 84cm (13'x33")
			57273ASS16	#57275 3.66m x 76cm (12'x30")
			57273ASS16	#57274 3.66m x 76cm (12'x30")
			57273ASS16	#57273 3.66m x 76cm (12'x30")
			57266ASS16	#57270 3.05m x 76cm (10'x30")
			57266ASS16	#57269 3.05m x 76cm (10'x30")
			57266ASS16	#57266 3.05m x 76cm (10'x30")
			57271ASS16	#57272 2.74m x 76cm (9'x30")
			57271ASS16	#57271 2.74m x 76cm (9'x30")
			57265ASS16	#57268 2.44m x 66cm (8'x26")
			57265ASS16	#57267 2.44m x 66cm (8'x26")
			57265ASS16	#57265 2.44m x 66cm (8'x26")

#### CHOOSE THE CORRECT LOCATION

**NOTE:** The pool must be set up on a completely flat and level surface. Please do not install the pool if the surface is inclined or sloped.

#### Correct conditions to set up the pool:

- The selected location has to be capable of uniformly supporting the weight for the entire time the pool is installed, moreover the location must be flat and must be cleared of all objects and debris including stones and twigs.

- We recommend positioning the pool away from any objects children could use to climb into the pool.

**NOTE:** Position the pool near an adequate drainage system to deal with overflow or to discharge the pool.

#### Incorrect conditions to set up the pool:

- On uneven ground the pool may collapse causing serious personal injury and/or damage to personal property and will void the warranty and prevent any service claims.
- Sand should not be used to create a level base; the ground must be dug out if necessary.
- Directly under overhead power lines or trees. Be sure the location does not contain underground utility pipes, lines or cables of any kind.
- Do not set up the pool on driveways, decks, platforms, gravel or asphalt surfaces. The selected location should be firm enough to withstand the pressure of the water; Mud, sand, soft/loose soil or tar are not suitable.
- Grass or other vegetation under the pool will die and may cause odors and slime to develop, therefore we recommend removing all grass from the selected pool location.
- Avoid areas prone to aggressive plant and weed species that may grow through the ground cloth or liner.

**NOTE:** Check with your local city council for by-laws relating to fencing, barriers, lighting and safety requirements and ensure you comply with all laws.

**NOTE:** If have a filter pump, refer to the pump's manual for instructions.

**NOTE:** The ladder must match the pool size and should be used only for entering and exiting the pool. It is forbidden to exceed the permitted payload of the ladder. Check regularly if the ladder is properly assembled.

#### Installation

Bestway Inflatables will not be responsible for damage caused to the pool due to mishandling or failure to follow these instructions.

**ATTENTION:** Do not use a high pressure air hose or over-inflate the top ring, it should be slightly stiff to the touch.

**NOTE:** Do not use extension power cords to power your pump.

**ATTENTION:** Do not drag the pool on the ground, this can damage the pool.

**NOTE:** The base or bottom of the pool should be laid out properly (flat without wrinkles).

**NOTE:** Hot temperatures cause air to expand the ring and may cause damage. Leave some room for expansion.


Please see FAQ's for additional information.

**ATTENTION:** Do not leave pool unattended while filling with water.

**Pool walls will rise as you fill with water.**

- Fill pool until water capacity is 80%, DO NOT OVERFILL as this could cause the pool to collapse. In times of heavy rainfall you may need to empty some of the water to ensure the level is correct.
- When filling the pool is completed, check that the water is not collecting on any side to ensure the pool is level.

**NOTE:** Drawings for illustration purposes only May not reflect actual product. Not to scale.

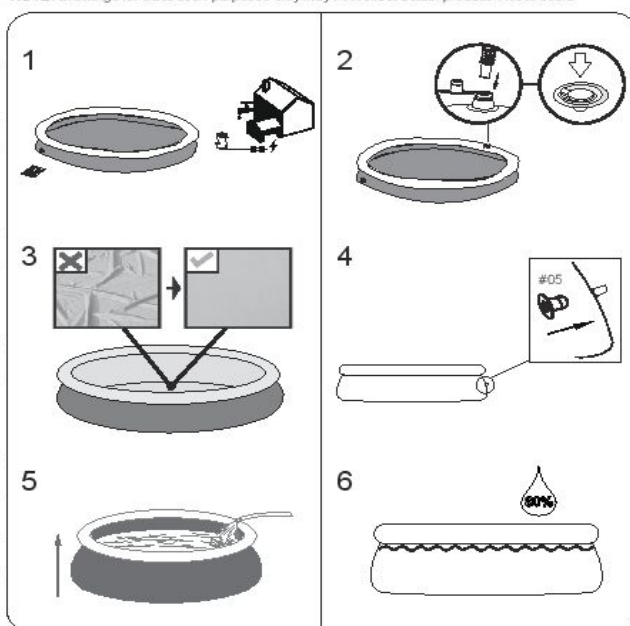


For 5.49m x 1.22m (18' x 48") pools, please refer to the connection valve installation on following page.

#### Connection Valve Assembly



For 5.49m x 1.22m (18' x 48") pool model (See Fig 1)

Fig 1

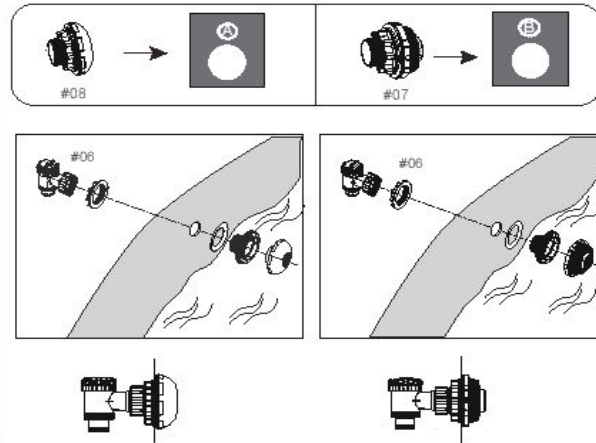

**NOTE:** If you want to connect other pool cleaning kits to the pool through the connection valve, use a Phillips screwdriver to disassemble the Debris Screen from the Connector. (See Fig 2)

Fig 2

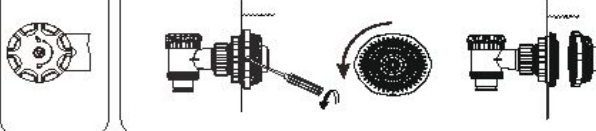

**IMPORTANT:** If pool is not level, drain water and re-level ground by digging out. Never attempt to move the pool with water in it, serious personal injury or damage to the pool may result.

**WARNING:** Your pool may contain a great deal of pressure. If your pool has any bulge or uneven side, then the pool is not level, the sides may burst and the water may discharge suddenly causing serious personal injury and/or damage to property.

## POOL MAINTENANCE

**Warning:** If you do not adhere to the maintenance guidelines covered herein, your health might be at risk, especially that of children. Pool water treatment is essential for the safety of the users. Using chemicals inappropriately will cause property damage and personal injury.

**NOTE:** The pump is used to circulate the water and to filter small particles. In order to keep your pool water clean and hygienic, you must also add chemicals:

- It is recommended not to fill the pool with catchment water, drilling water, or drainage well water: these waters generally contain polluted organic substances including nitrates and phosphates. Filling pools with water from the public network is advised.
- Always keep your pool clean and apply the correct pool chemicals. Unsuitable water is a serious health hazard. It is recommended to use disinfectant, flocculant, acid or alkali chemicals to treat your pool.
- Clean the PVC liner regularly with non-abrasive brushes or a pool vacuum cleaner.
- Throughout the season, the water filtration system must run long enough each day to clean the entire volume of water in the pool.
- Check the filter cartridge (or sand in a sand filter) regularly and replace dirty cartridges (or sand).
- Regularly check the screws, bolts and all the metal parts for rust. Replace if necessary.
- If it rains, check that the water level is not higher than the specified level.  
If water exceeds the specified levels, drain the pool to the specified level.
- Do not use the pump when the pool is in use.
- Cover the pool when not in use.
- For pool water treatment, the pH value is very important.

**ATTENTION: Do not leave the drained pool outside.**

The following parameters ensure good quality water

Parameters	Values
Water clarity	clear view of the pool bottom
Colour of the water	no colour should be observed
Turbidity in FNU/NTU	max. 1.5 (preferably less than 0.5)
Nitrate concentration above that of fill water in mg/l	max. 20
Total organic carbon (TOC) in mg/l	max. 4.0
Redox potential against Ag/AgCl 3.5 m KCl in mV	min. 650
pH value	6.8 to 7.6
Free active chlorine (without cyanuric acid) in mg/l	0.3 to 1.5
Free chlorine used in combination with cyanuric acid in mg/l	1.0 to 3.0
Cyanuric acid in mg/l	max. 100
Combined chlorine in mg/l	max. 0.5 (preferably close to 0.0 mg/l)

## Repair

Check pool for any leaks from valves or seams, check the ground cloth for any evident water loss. Do not add chemicals until this has been done.

**NOTE:** In the event of a leak, patch your pool using the Heavy-duty repair patch provided. Refer to the FAQs for further information.

## Dismantling

- Unscrew the drain valve cap counter-clockwise and remove.
- Connect the adaptor to the hose and put the other end of the hose in the area where you are going to drain your pool. (Check local regulations for drainage by-laws).
- Screw the control ring of the hose adaptor clockwise onto the drain valve. The drain valve will be open and water will start to drain automatically. Open the drain valve to the maximum position.
- Deflate the top ring by squeezing the air valve.
- When the top ring is fully deflated, press the top ring down, and tilt it to drain the pool easily. Completely drain the water in the pool.
- When draining is finished, unscrew the control ring to close the valve.
- Disconnect the hose.
- Screw the cap back onto the drain valve.
- Air dry pool.

## Storage and Winterization

- Please remove all the accessories and spare parts of the pool and store them clean and dry.
- Once pool is completely dry, sprinkle with talcum powder to prevent pool from sticking together. Fold pool carefully. If pool is not completely dry, mold may result and will damage the pool liner.
- Store liner and accessories in a dry place with a moderate temperature between 5°C / 41°F and 38°C / 100°F.
- During the rainy season, pool and accessories should be stored as per above instructions also.
- Improper draining of the pool might cause serious personal injury and/or damage to personal property.
- We strongly recommend the pool is disassembled during the off season (winter months). Store in a dry location out of children's reach.

## Frequently Asked Questions

### 1. What is a suitable base for the Fast Set pool?

Almost any completely flat, solid, level surface can be used. Do not use sand as a leveling material as it is prone to shifting under the pool. The ground should be dug out until it is perfectly level. Do not set up on driveways, decks, platforms, gravel or asphalt. The ground should be firm enough to withstand the weight and pressure of the water: mud, sand, soft / loose soil or tar are not suitable. A concrete base can be used but care should be taken not to drag the pool across the surface as abrasions could tear the liner. If the pool is to be set up on a lawn, it is recommended that the grass is removed from where the pool will sit as it will die and may cause odors / slime. Certain types of hardy grass can grow through the liner as can aggressive bushes / plants by the side of the pool. Ensure adjacent vegetation is cut back where necessary. Use of a ground cloth assists in protecting the base of the pool.

### 2. How will I know if my pool is set up on unlevel ground?

If your pool appears to be bulging on one side it is not set up on level ground. It is important that you empty your pool and move the pool to a level site. If the pool is not on level ground it will place undue stress on the seams and could result in the seams bursting which will cause flooding, property damage and potentially personal injury or death.

Fill your pool following the instructions in the owner's manual carefully. This will ensure that you do not waste water and the pool can be moved easily so that the ground can be leveled at an appropriate time and not after you have completely filled it with water.

### 3. How much pressure is recommended to use during inflation of the ring of my Fast Set pool?

We recommend the use of a Bestway inflation Pump (not included) or other low-pressure pump when attempting to inflate the top ring. The top ring is filled to capacity when it becomes round in shape and is firm to the touch. Pay attention to major temperature variation. An over-inflated ring heated by the sun may burst or could lead to leaks in the seam. If the ring feels too firm, let some of the air out. In cold ambient temperature the top ring will lose some pressure, it may appear as though the ring is deflating due to a leak, DO NOT add air since the air inside will expand again once the temperature rises. **Note:** Every use of air compressor or high pressure pump for the inflation of the ring is forbidden. Bestway inflatables will not be responsible for bursting of the ring due to the use of air compressor.

### 4. Can I have my pool filled by a water service?

We recommend using a garden hose under low pressure for filling your pool. If it is necessary to use a water delivery service, it is best to fill the pool with one inch of water by hose and smooth wrinkles first. Use a water service that is able to regulate the flow of water to prevent damage. Ensure you stop at each step as noted in the instruction manual to ensure your pool is level. Bestway will not be held responsible for pools damaged or weakened by water delivery services.

### 5. What is the maximum fill height of the pool?

Fill pool until water capacity is 80% up to the bottom of the inflated ring of the pool. Never attempt to fill your pool beyond the base of the ring. We recommend leaving extra room to account for water displacement when occupants are inside the pool. You may have to top up the water during the season which has been lost through evaporation or normal use.

### 6. My pool is leaking, what do I do to fix it?

The pool does not need to be emptied to fix any holes. Self-adhesive underwater repair patches can be purchased at your local pool / hardware store. For external use, use the repair patch provided. For internal holes, clean the hole on the inside of the pool to wipe off any oils and algae. Cut a circle large enough to cover the hole and apply the patch securely onto the side in the water. Cut a second patch and apply to the outside of the pool for extra strength. If the hole is in the base of the pool use one patch only and weight it down with a heavy object while it bonds. For a hole in the top ring, inflate the ring to locate the hole, mark the hole so you can see it easily and apply the patch pressing down firmly. Once it is applied, deflate the ring slightly to take some of the pressure off the patch. If the ring is completely deflated and the pool is empty put a heavy weight onto the patch to assist in bonding. If you have patched the pool when it is empty we recommend you leave it at least 12 hours before filling.

### 7. Where can I buy filter cartridges and how often should I change them?

Filter cartridges to fit your filter pump should be available from the store where you purchased your pool. If not, most mass retailers sell filter cartridges as an accessory. If you are unable to obtain replacements, please call our toll-free number and we will assist you in finding a source local to you. The cartridges should be changed every 2 weeks dependent upon use of the pool. Check the filter on a weekly basis and clean by hosing down any debris and particles. **Note:** Ensure your pump is disconnected from the electrical supply before checking the filter cartridge. You can also visit our website [www.bestway-service.com](http://www.bestway-service.com) for cartridge purchase.

### 8. How many times a year should I change the water?

This is dependant on the amount of use the pool receives, and the attention paid to covering the pool and keeping chemicals properly balanced. If maintained correctly, the water should last a full summer season. Please contact your local pool chemical supplier for detailed information regarding chemicals, they will be able to advise you how to best maintain the cleanliness of your water.

### 9. Do I need to take my pool down for the winter?

Yes, Above-ground pools may collapse under the weight of ice and snow and the PVC walls will be damaged. We recommend taking the pool down when temperatures fall below 8°C / 45°F. The pool should be stored indoors in a moderate temperature between 5°C / 41°F and 38°C / 100°F. Please store away from chemicals and rodents and out of the reach of children.

### 10. My pool is fading – why is that?

Excessive use of chemicals can cause the color of the inside of the liner to fade; this is similar to a swimsuit fading over time from repeated contact with chlorinated water.

### 11. How many years will the pool last?

There is no set time limit for the pool to last, following the instructions in the owner's manual and with proper care, maintenance and storage you can considerably increase the life of your pool. Improper set-up, use or care can result in failure of the pool.

### 12. Do you recommend the use of a filter pump with a Bestway Fast Set pool?

Absolutely! We strongly recommend you use a filter pump which will maintain the cleanliness of the water.

### 13. Which are the most important functions of my filter pump?

The most important function of a filter pump is the elimination of every sort of impurity from the water with the aid of a filter cartridge and chemical products for its sterilization.

### 14. The top ring is sitting on the inside of the pool wall when the pool is filled with water-why?

The top ring should always be on top of the pool wall. Do not press down on the top ring when filling the pool.

For more information and detailed video installation instructions, please visit our website at <http://www.bestway-service.com>

# Limited BESTWAY® Manufacturer's Warranty

The product you have purchased comes with a limited warranty. Bestway® stands behind our quality guarantee and assures, through a replacement warranty, your product will be free from manufacturer's defects that result in leaks.

The following provision is only valid within the European member states countries. The legal regulation of Directive 1999/44/EC will not be effected by this BESTWAY limited warranty.

The limited warranty is valid: 1 year warranty for the filter pump or sand filter, 180 days warranty for the pool, 90 days warranty for all other components from the date of purchase.







To enact a warranty claim, this form must be completed and submitted with a copy of your purchase receipt to your local Bestway After Sales Center. Before any claims can be accepted, the Bestway After Sales Center may ask you to send a piece of the defective part to the centre (e.g. a cut out of the production batch number / drain valve). Please contact your local Bestway After Sales Center before sending any documents – they will provide full instructions of what is needed for your claim.

Bestway® is not responsible for economic loss due to water or chemical costs. Bestway® will not replace any products deemed to have been damaged due to negligence or having been used outside of the owner's manual guidelines.

Bestway's warranty covers manufacturing defects discovered while unpacking the product or during use, within the limits of a use and respectful of warnings and instructions given within the user's manual. This warranty applies only to product which must not have been modified by any 3rd parties. The product must be stored and handled in accordance with the technical recommendations.

The Limited Warranty is valid from the period indicated above and the date to be considered as the start of the warranty is only the one shown in the original receipt / purchase invoice.

Please choose the type of your pool:



Date of purchase receipt: \_\_\_\_\_ Customer Code Number: \_\_\_\_\_

TO: Bestway® Service Department DATE \_\_\_\_\_

FAX/E-MAIL/TEL: Please refer to your country according to the information you find on the back cover or on our website: [www.bestway-service.com](http://www.bestway-service.com)

Please provide your address details in full. **Note:** Incomplete address details will result in delayed shipments.

Bestway reserves the right to charge for redelivery of undelivered packages where the recipient is at fault.

## REQUIRED INFORMATION - PLEASE WRITE THE DELIVERY ADDRESS

Name: \_\_\_\_\_ Address: \_\_\_\_\_

Zip code: \_\_\_\_\_ Retailer: \_\_\_\_\_



Country: \_\_\_\_\_ City: \_\_\_\_\_

Mobile: \_\_\_\_\_ Telephone: \_\_\_\_\_

Fax: \_\_\_\_\_ E-mail: \_\_\_\_\_

Please write the Batch Number and Item Code located near the drain valve

Batch Number: \_\_\_\_\_ Item Code: \_\_\_\_\_

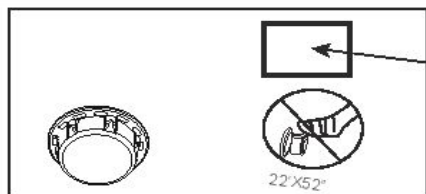

Item Code

Batch Number

## Description of problem

☐ Item tears / Leaking

☐ Faulty welding

☐ Faulty upper ring

☐ Faulty drain valve

☐ Others, please describe

☐ Missing part - Please use the code for the missing part, this can be found in the owner's manual.

## IMPORTANT: ONLY THE DAMAGED PART WILL BE REPLACED, NOT THE COMPLETE SET.

Bestway reserves the right to request photographic evidence of defective parts, or to require the sending of the item for additional testing. In order to best assist you, we request all information you provide is complete.

FOR FAQ, MANUALS, VIDEOS OR SPARE PARTS, PLEASE VISIT OUR WEBSITE [WWW.BESTWAY-SERVICE.COM](http://WWW.BESTWAY-SERVICE.COM)

VIDEOS ARE ALSO AVAILABLE ON OUR BESTWAY CHANNEL ON YOUTUBE: <http://youtube.com/user/BestwayService>

**Bestway®**